
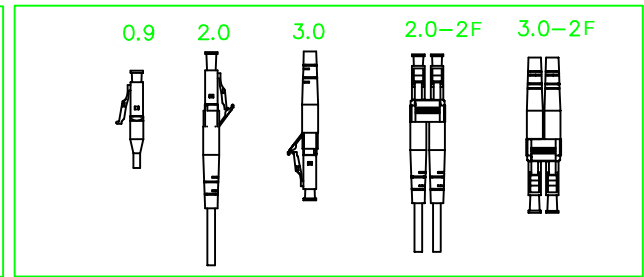


| SPECIFICATION |  |
|---------------|--|
| Connector     | LC-SC                                  |
| Cable Type    | Ø2.0, DX                               |
| Jack Color    | OM4: Violet                            |
| Length        | Customized                             |
| IL            | UPC≤0.3dB<br>APC≤0.3dB                 |
| RL            | SM:UPC≥50dB<br>APC≥60dB<br>MM:UPC≥35dB |

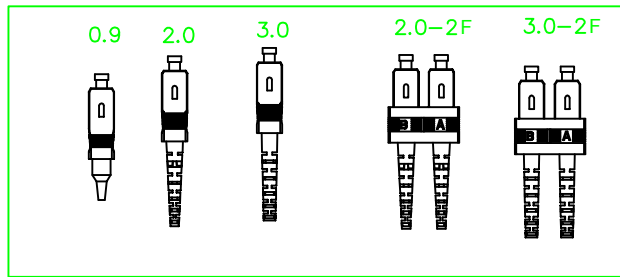

**OPERATION:**  
 Increase in insertion loss after 500 mating:0.3dB Max  
 Operation Temperature:-20°Cto+70°C  
 Storage Temperature:-40°Cto+80°C  
 Humidity(non-condensing)95%RH  
 Tensile strength>70N

|                              |            |                           |                |                        |
|------------------------------|------------|---------------------------|----------------|------------------------|
| PART NAME<br>LC-SC Patchcord |            | PART NO.<br>DF-PC-07-XXXX |                |                        |
| DRWN                         |            | CHKD                      |                | APROVED                |
| SCALE                        | UNIT<br>MM | QTY<br>PCS                | PAGE<br>1 OF 1 | THIRD ANGLE PROJECTION |