


SPECIFICATION

| | |
|------------|--|
| Connector | SC-SC |
| Cable Type | Ø2.0, DX |
| Jack Color | OM4:Violet |
| Length | Customized |
| IL | UPC≤0.3dB APC≤0.3dB |
| RL | SM:UPC≥50dB APC≥60dB MM:UPC≥35dB |

OPERATION:

Increase in insertion loss after 500 mating:0.3dB Max
 Operation Temperature:-20°Cto+70°C
 Storage Temperature:-40°Cto+80°C
 Humidity(non-condensing)95%RH
 Tensile strength>70N

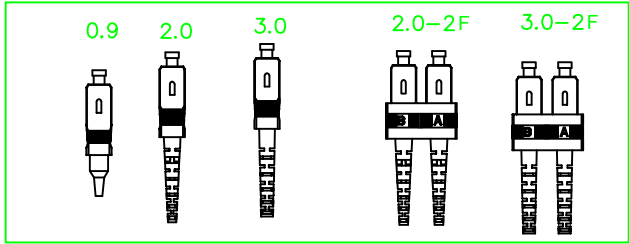

| | | | | |
|------------------------------|------------|---------------------------|----------------|------------------------|
| PART NAME SC-SC Patchcord | | PART NO. DF-PC-06-XXXX | | |
| DRWN | | CHKD | | APPROVED |
| SCALE | UNIT MM | QTY PCS | PAGE 1 OF 1 | THIRD ANGLE PROJECTION |