


SPECIFICATION	
Connector	SCAPC-SCUPC
Cable Type	Ø2.0. DX
Jack Color	SM:Yellow
Length	Customized
IL	UPC≤0.3dB APC≤0.3dB
RL	SM:UPC≥50dB APC≥60dB MM:UPC≥35dB

**OPERATION:**  
 Increase in insertion loss after 500 mating:0.3dB Max  
 Operation Temperature:-20°Cto+70°C  
 Storage Temperature:-40°Cto+80°C  
 Humidity(non-condensing)95%RH  
 Tensile strength>70N

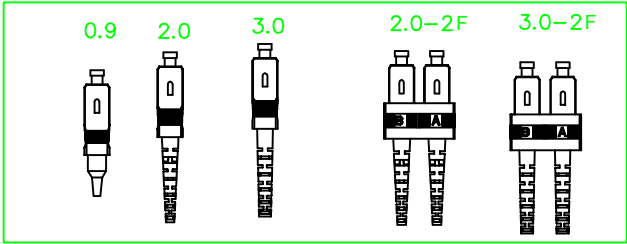

PART NAME SC-SC Patchcord			PART NO. DF-PC-06-XXXX		
DRWN		CHKD		APPROVED	
SCALE	UNIT MM	QTY PCS	PAGE 1 OF 1	THIRD ANGLE PROJECTION	