


A B C D E F G H


△	Rav	Detail	Rav	Date
△	A	NEW RELEASE	Kelvin	2013-09-24
△				

### LC/UPC Ø0.9mm SM G657A White LSZH tight-buffered Cable Pigtail

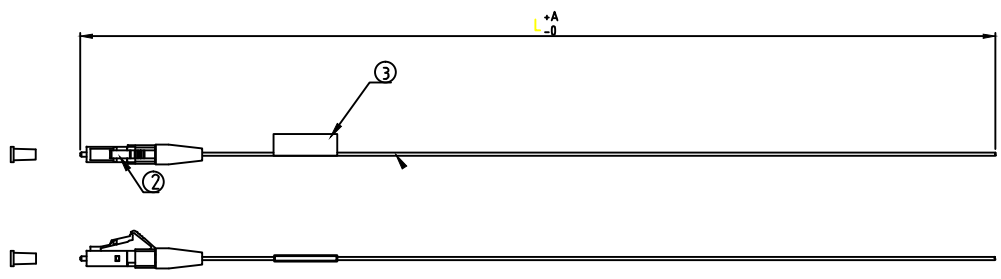

Length (M)	Min	Max	Unit
L<1.5	0	50	mm
L>=1.5	0	5	%

- Noto
1. All parts complaint with RoHS
  2. Compliance with Telcordia GR326
  3. Optical Performance



1. Wide:25mm,Length:30mm;  
2. S/N: The date of production +Sequential number • Example:13092200001

Item	SM				MM
	1310nm		1550nm		850nm
	UPC	APC	UPC	APC	UPC
Insertion Loss	</=0.3dB	</=0.3dB	</=0.3dB	</=0.3dB	</=0.2dB
Return loss	>/=50dB	>/=60dB	>/=50dB	>/=60dB	>/=35dB

Part No.	Fiber Type	Cable	Connector Housing	Boot
410LXX	G.652D	White	Blue	White
A10LXX	G.657A	White	Blue	White
510LXX	62.5/125 OM1	White	Beige	White
610LXX	50/125 OM2	White	Beige	White
710LXX	50/125 OM3	Aqua	Beige	White
D10LXX	50/125 OM4	Purple )	Beige	White

3	Lable	1
2	LC 0.9mm Connector	1
1	φ0.9mm, LSZH tight-buffered Cable	L
DESCRIPTOPN		Qty

Title	LC/UPC Ø0.9mm G657A LSZH tight-buffered Cable Pigtail			
Ser.No:		Spec:		
Drawing	Kelvin	2013-09-24	Drawing No:	
Check	Bill	2013-09-24	Material:	
Approve	William	2013-09-24	Scale: N/A	Unit: mm
			⊕	Ver: 1.00 Page: 1 of 1